



# PERFECT SHUTTERS, inc.

The World's Largest Selection of Styles, Sizes, & Colors

[www.perfectshutters.com](http://www.perfectshutters.com)

[sales@perfectshutters.com](mailto:sales@perfectshutters.com)

## Installation Instructions Metal Shutter Screws

**WATCH OUR INSTALLATION VIDEO:** <http://perfectshutters.com/product-support/installation-2/>

1. Lay the shutter face up on a clean, flat surface.
2. Measure 2 inches down from the top of the shutter and up from the bottom of the shutter and mark a spot in the center of the side rail. Mark each side rail at the center/center. **(SEE FIGURE #1)**
3. Drill a 1/4" inch diameter hole at each of the marks. **(SEE FIGURE #1)**
4. Position the shutter on the house next to the window. Using a suitable marker, mark the mounting hole locations on the building.
5. Remove the shutter and, where marked, drill a 1/4" inch diameter hole through the Wood, Vinyl or Aluminum siding only.  
**\*Do not drill into the wall\***
6. If the wall is Wood
  - Drill a 1/8" inch diameter hole, 1 3/4" deep into the wall.If the wall is Masonry or Brick
  - For Masonry or Brick you will need a screw anchor for a #10 screw. The type of anchor purchased will determine the diameter of the hole. Follow the anchor manufacturer's instructions for installation
7. Position the shutter on the house next to the window and fasten with the metal screws provided.  
**\*Be careful not to over tighten the metal screws or the shutter will become distorted\***  
**\*We suggest using a Hand Screw Driver rather than a Power Drill\***
8. Repeat this process for all remaining shutters.

**FIGURE #1**


### **\* For the Warranty to Be In Force \***

The shutter must be mounted with the shutter screws in the positions specified in the illustration. The shutter screws must go into the wall.

## TOOLS REQUIRED

- Power Drill
- Pencil/Marker
- Phillips Head Screw Driver
- 1/4" Drill Bit
- Tape Measure
- 1/8" Drill Bit

\* If Installing on Masonry or Brick Surface, Purchase #10 Screw Anchors \*

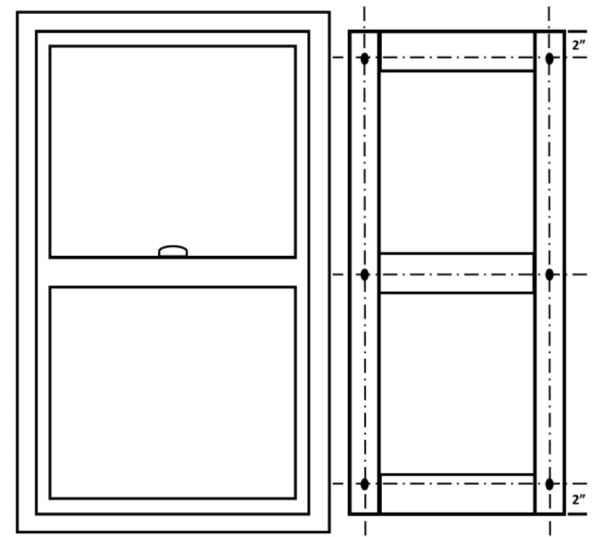

# Exterior Shutters

## Limited Lifetime Warranty

### POLYPROPYLENE AND POLYSTYRENE SHUTTERS

Perfect Shutters, Inc. warrants its products (which are installed in accordance with the manufacturer's published installation instructions) against any defects in material or workmanship causing breaking, cracking, splitting or warping, for as long as you own the home or building on which the shutters were originally installed. This warranty is non-transferable. Coverage terminates if you sell or otherwise transfer ownership of your shutters. Any claims under this warranty must be made in writing

To: **Perfect Shutters, Inc.**  
**Attn: Warranty Dept**  
**12213 Hwy. 173**  
**Hebron, IL 60034**

**Painting:** Paint, if painted by the manufacturer, is warranted one year from purchase not to peel or flake. Fading is normal and is not covered by warranty.

**ALL PAINTABLE SHUTTERS (#049 OR #049G) MUST BE PAINTED**

**WARRANTY VOID if shutters are not primed and painted to manufacturer's instructions.**

All claims must be accompanied by proof of purchase together with the owner's name, address, telephone number, and brief description of the problem. In order to honor warranty, the customer must comply with reasonable manufacture requests in order to determine cause of problem. This warranty gives you specific legal rights and you may also have other rights which vary from state.

In the event of defect (as described above) Perfect Shutters, Inc. should first be given reasonable opportunity to determine its possible responsibility prior to any repairs or replacements being made and the defective shutters must be returned to Perfect Shutters, Inc., PREPAID. Upon receipt and at its option, Perfect Shutters, Inc., will repair or replace the defective shutters and return the repaired or replaced shutters to the claimant.

**Perfect Shutters, Inc. is not responsible for any costs or expenses incurred in the removal or reinstallation of its product nor is it responsible for any inconvenience, commercial loss, incidental or consequential damages.** Some states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation may not apply to you. This warranty does not cover damages or defects caused by product misuse or abuse, improper installation, fire, weathering or acts of God such as hurricanes, tornadoes or hailstorms.

## Care and Cleaning

### All Polypropylene or Polystyrene Products

Generally, your Perfect Shutters Products can be cleaned satisfactorily with the use of an ordinary garden hose.

**\*If this does not do the job, we suggest the following\***

1. With a garden hose and a soft bristle brush, wash your shutters gently.
2. Where soil is of a stubborn nature, the following cleaning solutions work well:
  - 1/3 cup detergent (Tide for example)
  - 2/3 cup Tri-Sodium (Soilax for example)
  - 4 quarts of water
3. Where your Perfect Shutters are extremely dirty, it is recommended that you start washing from the top and work down to the bottom. Apply cleaning solution and let stand for several minutes in order for the dirt to loosen. The shutters and siding must be rinsed thoroughly to avoid staining and/or streaking.

**For Inquiries, Please Call (800) 548-3336**